

MD-150R



- 15" 1024x768 (XGA 4:3) Resolution
- Wide Operating Temperature (-30~70° C)
- Metal Cabinet with Diverse Installing Options
- Made in Taiwan, 3 Years Warranty
- Designed for All Environments
- High Brightness Option
- AG/AR/AF Film Options
- All Kind of Connectors Option (VGA/DVI/HDMI/DP)

I/O Interfaces

Standard	VGA x1, DVI x1
Audio Input	TRS connector 3.5mm of stereo x1
Speaker	2W x2

Mechanical

Cabinet	Galvanized steel (SECC)
Dimension (Max)	333x260.7x47 mm
Wall Mount Hole	75x75 / 100x100 mm
Net Weight	≤ 3 KG

Power

Power Input	DC-12V, with AC/DC Adapter 100~240V
Power Connector	DC Jack Φ2.1mm

Environmental

Operating Temperature	-30-70°C
-----------------------	----------


General

Screen Diagonal	15.0 inch
Display Area	304.1x228.1mm
Resolution	1024x768 (XGA)
Brightness(nits)	300
Contrast Ratio	2500:1
Display Ratio	4:3
Support Color	16.7M Color
Pixel Pitch	0.297x0.297 mm
Response Time	21 msec
Backlight Unit	LED (white LED)
Viewing Angle (L/R,U/D)	176° / 176° (IPS)
Backlight Life Time	70000 HRS
Surface Treatment	Anti-glare, Hardness 3H

Option

Brightness	500/1000/1600
Display Input Option	VGA + HDMI + DVI/VGA + HDMI + DP/VGA + HDMI + RS-232
Surface Film Options	AFP(Anti-Fouling/Fingerprint)/AR(Anti-Reflective)/AS(Anti-Spy)
Cabinet Options	Stainless Steel/Aluminum

Dimensions

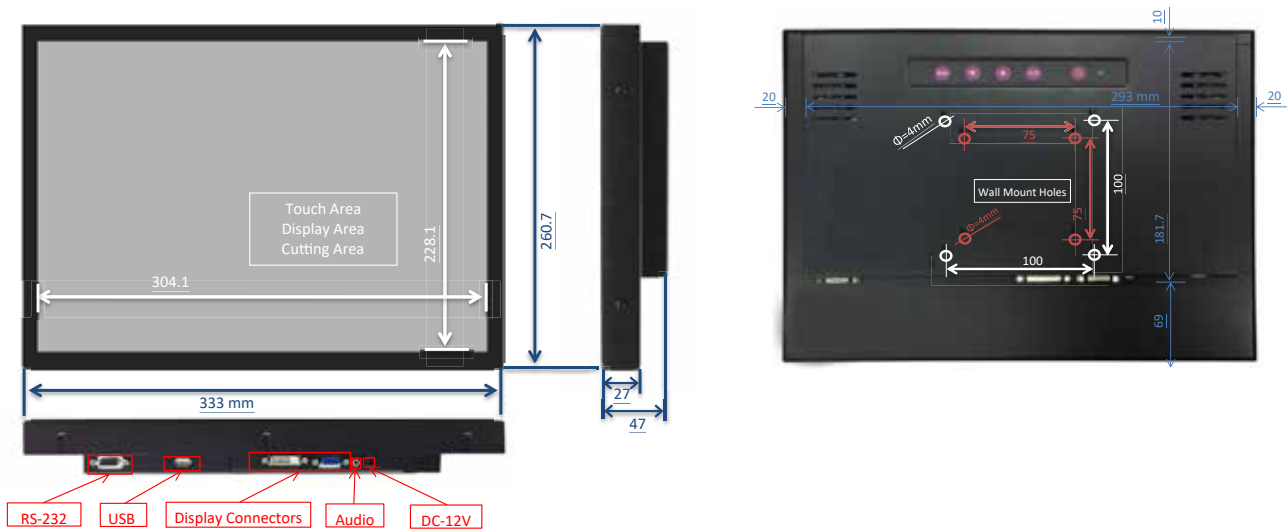

Ordering Information

Monitor

Model Number	AL8-3044
Description/Configuration	15" 1024x768 (XGA 4:3)/Industrial Touch Display/5 Wire Resistive Touch/VGA/DVI

Accessories

Model Number	AL8-3046
Description/Configuration	9~36V Adapter for MD-150R/MD-150P/MD-156R/MD-156P/MD-170R/MD-170P/MD-185R/MD-215R/MD-215P
Model Number	AL8-3047
Description/Configuration	Panel Mount Kit/only for MD-150R



Tel: +886-2-7739-5566
 Fax: +886-2-7715-0609
 Mail: info@Mitwell.com.tw
 Address: No.55, Ln. 6, Chenglin Rd., Tucheng Dist., New Taipei City 236, Taiwan (R.O.C.)